

# SC420TWHL

## mA and Voltage Input Isolating Terminals



- **Replace Standard DIN-Rail Terminals**
- **RFI Protection, Input Isolation**
- **Voltage or Current Inputs**
- **Simple 2 Wire 4-20mA Output**
- **Loop Powered Output Gives High Noise Immunity**
- **Low Cost Solution**

### Input Options

The range of inputs for the SC420TWHL are as follows:-

Standard Ranges are 4-20mA, 0-20mA, 0-10V and 1-5V.

But the unit can cover the following ranges:-

Input Types	Input Range MIN	Input Range MAX
DC Current	0 - 100µA	0 - 5 A
DC Voltage	0 - 100mV	0 - 100 V

The SC420TWHL series of isolating terminal blocks can replace standard DIN-Rail terminal to provide input isolation, signal conversion and excellent RFI and noise rejection

The units are powered from the output side, making them ideal for plc and data acquisition applications.

Inputs for the SC420TWHL include mA or Voltage and other units are available with thermocouple, mV or RTD inputs. The standard output is 4-20mA.

The SC420TWHL units are housed in ultra-compact DIN-rail mounted enclosures just 18mm wide.

### Technical Specifications

Parameter	Min	Typ	Max	Comments
Supply Voltage	10V	24V	32V	Powered from Output Side
Input Current	0mA	0-20mA	30mA	
Full Scale Volt Drop		0.2V	0.3V	On Input Side (20mA Input)
Input Impedance (Volt In)		1MΩ		Voltage Input
Input Impedance (mA In)		10MΩ		mA Input
Output Linearity Error		±0.1%		
Temp Coefficient			100ppm/°C	
Load Resistance Error			±5ppm/Ω	0 < RL < 600Ω
Time Constant (10-90%)		30ms		300ms for Thermocouple Input
Operating Ambient	-15°C		70°C	
Relative Humidity	0%		90%	
Isolation Voltage		1kV		
Surge Voltage		2.5kV for 50µs Transient of 10kV/µs		

### Notes

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. Device is protected against reverse polarity connection.


Accuracy figures based on 0-20mA input, 250Ω load resistance, and an ambient temperature of 20°C.

### Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor Size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 50g

### Ordering Information

Part No.: SC420TWHL 4-20mA In 4-20mA Out

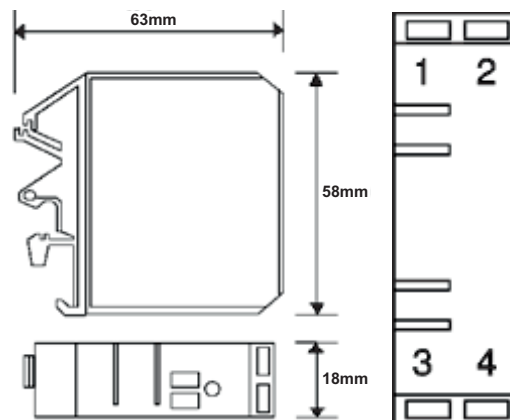

### Connection Details

1. Output Channel +ve
2. Output Channel -ve
3. Input Channel +ve
4. Input Channel -ve

Cynergy3 Components Ltd.  
7 Cobham Road  
Ferndown Industrial Estate  
Wimborne, Dorset BH21 7PE  
Telephone +44 (0) 1202 897969  
Email:sales@cynergy3.com

ISO9001 CERTIFIED

SC420TWHL 2017

© 2017 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.



Made in the UK

www.cynergy3.com