


# A Dimensions: [mm]







### sectional drawing A-A



Scale - 2:1

Reference on drawing	Description		
•	Start of winding		
Marking	391 (Inductance Code)		

# B Recommended land pattern: [mm]









### **D Electrical Properties:**

Properties	Test conditions		Value	Unit	Tol.
Inductance	100 kHz/ 5 mA	L	390	μН	±10%
Rated current	∆T = 40 K	I <sub>R</sub>	1.00	А	max.
Saturation current	IΔL/LI < 10%	I <sub>sat</sub>	0.80	А	typ.
DC Resistance		R <sub>DC</sub>	0.47	Ω	typ.
DC Resistance		R <sub>DC</sub>	0.52	Ω	max.
Self resonant frequency		f <sub>res</sub>	2.2	MHz	typ.

### **E General information:**

It is recommended that the temperature of the part does not exceed 125°C under worst case operating conditions.

- •Ambient temperature: -40°C to +85°C (refering to I<sub>R</sub>)
- •Operating temperature: -40°C to +125°C
- •Storage temperature (on tape & reel): -20°C to +40°C; 75% RH max.
- •Test conditions of Electrical Properties: 20°C, 33% RH if not specified differently

				Projection ,
4.0	2016-06-16	KaS	MaKa	
3.0	2016-03-23	KaS	MaKa	
2.6	2014-09-10	SSt	SSt	Würth Elektronik eiSos
2.5	2014-03-31	SSt	SSt	EMC & Inductive Solution Max-Eyth-Str. 1
2.4	2013-04-29	SSt	SSt	74638 Waldenburg
2.3	2013-03-12	SSt	COt	Germany Tel. +49 (0) 79 42 945
2.2	2012-12-10	SSt	SSt	www.we-online.com eiSos@we-online.com
DEV	DATE	DV	CHECKED	1 CIOUS₩WC-UHIHIE.CUITI



Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com

DESCRIPTION

# **WE-TI Radial Leaded Wire Wound Inductor**

Order.- No.

7447452391




SIZE A4

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment only. This product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, strip control), transportation (automotive control, train control, strip control), transportation (automotive control, train control, strip control), transportation (automotive control, train control, trai the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.



### F1 Typical Inductance vs. Current Characteristics:

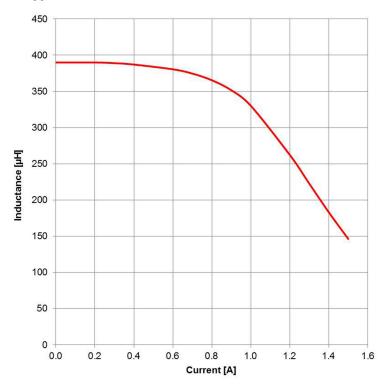

				_
				P
4.0	2016-06-16	KaS	MaKa	
3.0	2016-03-23	KaS	MaKa	
2.6	2014-09-10	SSt	SSt	٧
2.5	2014-03-31	SSt	SSt	E
2.4	2013-04-29	SSt	SSt	7
2.3	2013-03-12	SSt	COt	T
2.2	2012-12-10	SSt	SSt	v e
REV	DATE	BY	CHECKED	] [

Projection -

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com DESCRIPTION

**WE-TI Radial Leaded Wire Wound Inductor** 

Order.- No.

Size: 8012


7447452391

COMPLIANT ROHS&REACH WÜRTH ELEKTRONIK

SIZE A4


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard and reliability standard and reliability standard is especially required or where a failure of the products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

### **G1 Packaging Specification - Tray [mm]:**

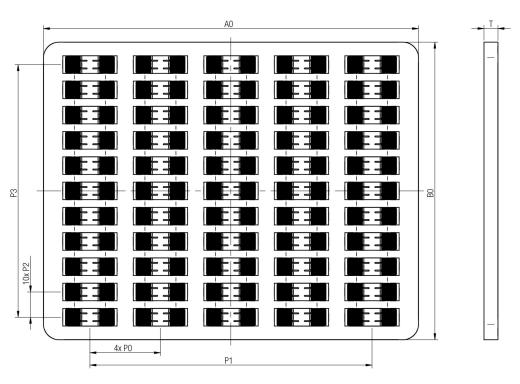

		A0	В0	P0	P1	P2	P3	T	Tray	VPE / packaging unit
	tolerance	typ.	typ.	ref.	ref.	ref.	ref.	ref.		
	6065	193,00	243,00	26,50	132,50	11,00	207,00	8,00		120
	8055	183,00	243,00	28,00	112,00	15,50	201,50	9,50		140
_ n	8075	193,00	243,00	19,00	131,20	17,00	222,00	9,50		140
size	8095	193,00	243,00	19,00	131,20	17,00	222,00	9,50	PET	140
"	8012	243,00	193,00	34,50	188,00	17,00	161,50	11,00		100
	8012B	193,00	243,00	25,00	150,60	14,50	217,50	10,00		100
	1014	243,00	193,00	51,00	174,00	17,00	153,00	11,00		80





		A0	B0	Т	Top Cover
tolerance		typ.	typ.	ref.	
	6065	194,00	244,00	8,00	
	8055	184,00	244,00	9,50	
a	8075	194,00	244,00	8,00	
size	8095	194,00	244,00	8,00	PET
0,	8012	244,00	194,00	11,00	
	8012B	194,00	244,00	10,00	
	1014	244,00	194,00	11,00	

_				·
	4.0	2016-06-16	KaS	MaKa
	3.0	2016-03-23	KaS	MaKa
	2.6	2014-09-10	SSt	SSt
	2.5	2014-03-31	SSt	SSt
	2.4	2013-04-29	SSt	SSt
	2.3	2013-03-12	SSt	COt
	2.2	2012-12-10	SSt	SSt
	REV	DATE	BY	CHECKED



Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com DESCRIPTION

### **WE-TI Radial Leaded Wire Wound Inductor**

Order.- No.

Size: 8012

7447452391




SIZE A4

This electronic component has been designed and developed for usage in general electronic equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co Kg products are neither designed nor intended for use in a reasa such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co Kg must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

### **H Soldering Specifications:**



### **H4: Classification Wave Soldering Profile:**

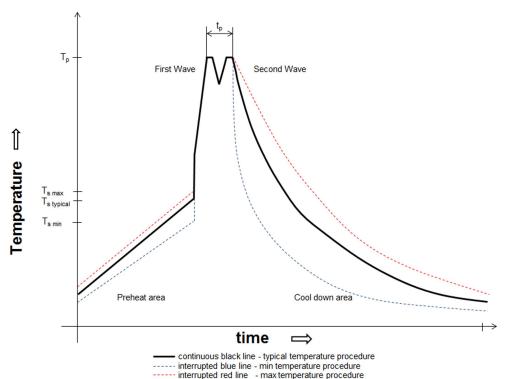

### **H5: Classification Wave Profile**

Profile Feature	Pb-Free Assembly	Sn-Pb Assembly
Preheat		
- Temperature Min (T <sub>smin</sub> )	100°C	100°C
- Temperature Typical (T <sub>stypical</sub> )	120°C	120°C
- Temperature Max (T <sub>smax</sub> )	130°C	130°C
- Time (t <sub>s</sub> ) from (T <sub>smin</sub> to T <sub>smax</sub> )	70 seconds	70 seconds
$\Delta$ preheat to max Temperature	150°C max.	150°C max.
Peak temperature (T <sub>p</sub> )	250°C - 260°C	235°C - 260°C
Time of actual peak temperature (t <sub>n</sub> )	max. 10 seconds	max. 10 seconds
P	max. 5 second each wave	max. 5 second each wave
Ramp-down rate		
- Min	~ 2 K/s	~ 2 K/s
- Typical	~ 3.5 K/s	~ 3.5 K/s
- Max	~ 5 K/s	~ 5 K/s
Time 25°C to 25°C	4 minutes	4 minutes

refer to EN 61760-1:2006

				Projection ,		DESCRIPTION			
4.0	2016-06-16	KaS	MaKa	<del></del>					
3.0	2016-03-23	KaS	MaKa	7		WE-TI Radial Le	aded Wire Wound Inde	uctor	
2.6	2014-09-10	SSt	SSt	Würth Elektronik eiSos Gmbl	H & Co. KG				
2.5	2014-03-31	SSt	SSt	EMC & Inductive Solutions Max-Eyth-Str. 1					
2.4	2013-04-29	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZF	
2.3	2013-03-12	SSt	COt	Germany Tel. +49 (0) 79 42 945 - 0		7447450004	ROHS&REACH	OIZE	
2.2	2012-12-10	SSt	SSt	www.we-online.com eiSos@we-online.com		7447452391 WÜRTH ELEKTRONIK		A4	
REV	DATE	BY	CHECKED	CIOOSSWC OIIIIIC.COIII		Size: 8012		-	

### **I Cautions and Warnings:**

# The following conditions apply to all goods within the product series of WE-TI of Würth Elektronik eiSos GmbH & Co. KG:

#### General:

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The usage and operation of the product within ambient conditions, which probably alloy or harm the wire isolation, has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. The product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endangered to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.

Cleaning agents that are used to clean the customer application might damage or change the characteristics of the component, body, pins or termination.

Direct mechanical impact to the product shall be prevented as the ferrite material of the core could flake or in the worst case it could break.

#### Product specific:

Follow all instructions mentioned in the data sheet, especially:

- •The soldering profile has to be complied with according to the technical wave soldering specification, otherwise this will void the warranty.
- •All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be ensured.
- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- Strong forces and high accelerations of the components of the sizes 1014 and 8012 might have the effect of damaging the electrical connection or to harm the circuit board due to the heavy weight of the component. These damages will void the warranty.

The general and product specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness.



				P
4.0	2016-06-16	KaS	MaKa	
3.0	2016-03-23	KaS	MaKa	
2.6	2014-09-10	SSt	SSt	٧
2.5	2014-03-31	SSt	SSt	E
2.4	2013-04-29	SSt	SSt	7
2.3	2013-03-12	SSt	COt	G
2.2	2012-12-10	SSt	SSt	w e
REV	DATE	BY	CHECKED	٦

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com DESCRIPTION

**WE-TI Radial Leaded Wire Wound Inductor** 

Order.- No.

Size: 8012

7447452391

COMPLIANT ROHS&REACH WÜRTH ELEKTRONIK SIZE A4

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard and reliability standard and reliability standard is especially required or where a failure of the products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

### **J Important Notes:**

### The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications.

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further gueries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.



#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Flektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

				Projection ,
4.0	2016-06-16	KaS	MaKa	<u>-1</u>
3.0	2016-03-23	KaS	MaKa	<b>9</b>
2.6	2014-09-10	SSt	SSt	Würth Elektronik eiSo
2.5	2014-03-31	SSt	SSt	EMC & Inductive Solu Max-Evth-Str. 1
2.4	2013-04-29	SSt	SSt	74638 Waldenburg
2.3	2013-03-12	SSt	COt	Germany Tel. +49 (0) 79 42 94
2.2	2012-12-10	SSt	SSt	www.we-online.com eiSos@we-online.com
REV	DATE	BY	CHECKED	CIOOS@WE-OHIIIIE.COM

os GmbH & Co. KG itions 45 - 0

DESCRIPTION

WE-TI Radial Leaded Wire Wound Inductor

Order.- No.

7447452391

COMPLIANT

SIZE Α4

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.